

MobyKit

For swing gates with leaves up to 3m, surface mounted.

Gear motor characteristics:

- die-cast aluminium monoblock
- patented layout of the internal components: **fewer components means**
- **quick power supply connector**
- **built-in capacitor**
- **moving parts manufactured in solid bronze alloy and metal**

- **slowdown during opening and closing**
- painted, aluminium, Moby key-operated unlock system, **ergonomic and easy to operate**
- **easy adjustment of the limit switches**

The kit contains:



MB4005
2 electromechanical gear motors, with key release

N.B. The content of the package may vary: consult the retailer.



FL02R-S
1 transmitter
433.92MHz,
2 channels



A60
1 control unit A400
with plug-in receiver SMXI



MOF
1 pair of photocells
for outdoor installation



MOSE
1 key selector switch
for outdoor installation



LUCY
1 flashing light
ABFKIT
1 directional aerial





TS
signboard

Code	Description	Pack/pallet
MOBYKCE	Kit for automating swing gates with leaves up to 3m, surface mounted	12

Technical specifications		MB4005
Power	(Vac 50Hz)	230
Current absorbed	(line) (A)	1.1
Power absorbed	(W)	230
Incorporated capacitor	(µF)	7
Protection level	(IP)	44
Speed	(m/s)	0.016
Travel	(mm)	310
Max thrust	(N)	2000
Working temp.	(°C Min/Max)	-20 ÷ +50
Thermal cut-out	(°C)	140
Work cycle	(%)	30
Weight	(Kg)	20.5

Utilisation limits

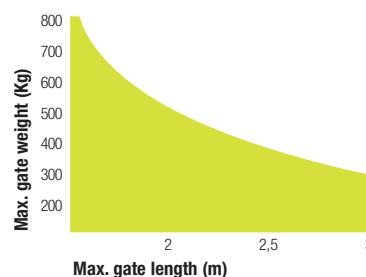

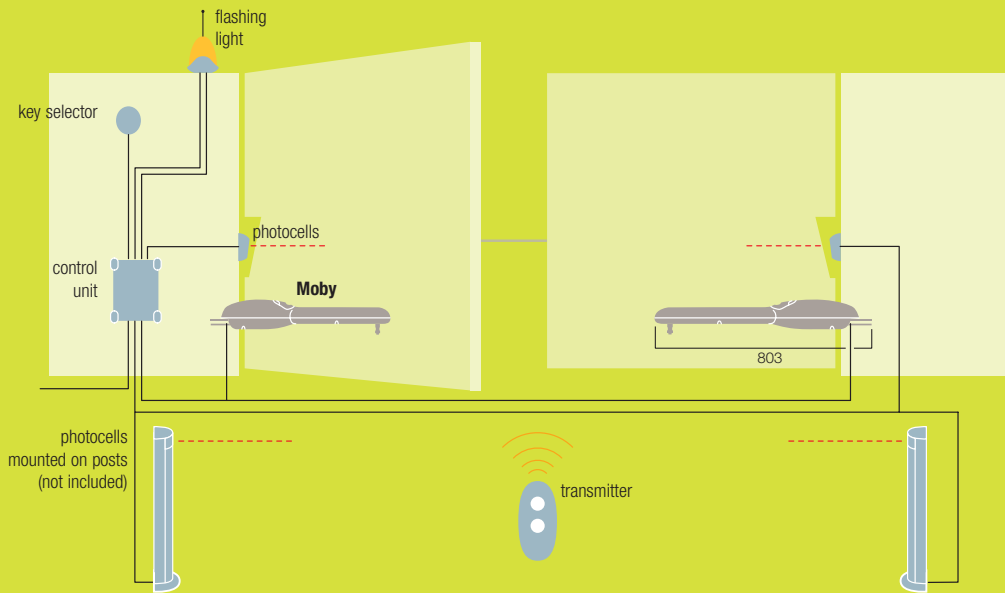

Approximate draft

Accessories



PLA6
rear racket 250mm long
Pc/pack 1



PLA14
screw-adjustable rear bracket
Pc/pack 2



PLA15
screw-adjustable front bracket
Pc/pack 2



PLA10
vertical 12V electric lock
(required for gates longer than 3m)
Pc/pack 1



PLA11
horizontal 12V electric lock
(required for gates longer than 3m)
Pc/pack 1



PLA13
travel stops for closing and opening manoeuvres
Pc/pack 4



Nice recommends customers order products in pallets in order to facilitate storage and delivery, and ensure packs are uniform. The number of packs per single pallet has been specified for this reason.